


# VOLVO B8L DOUBLE DECKER

Euro 6

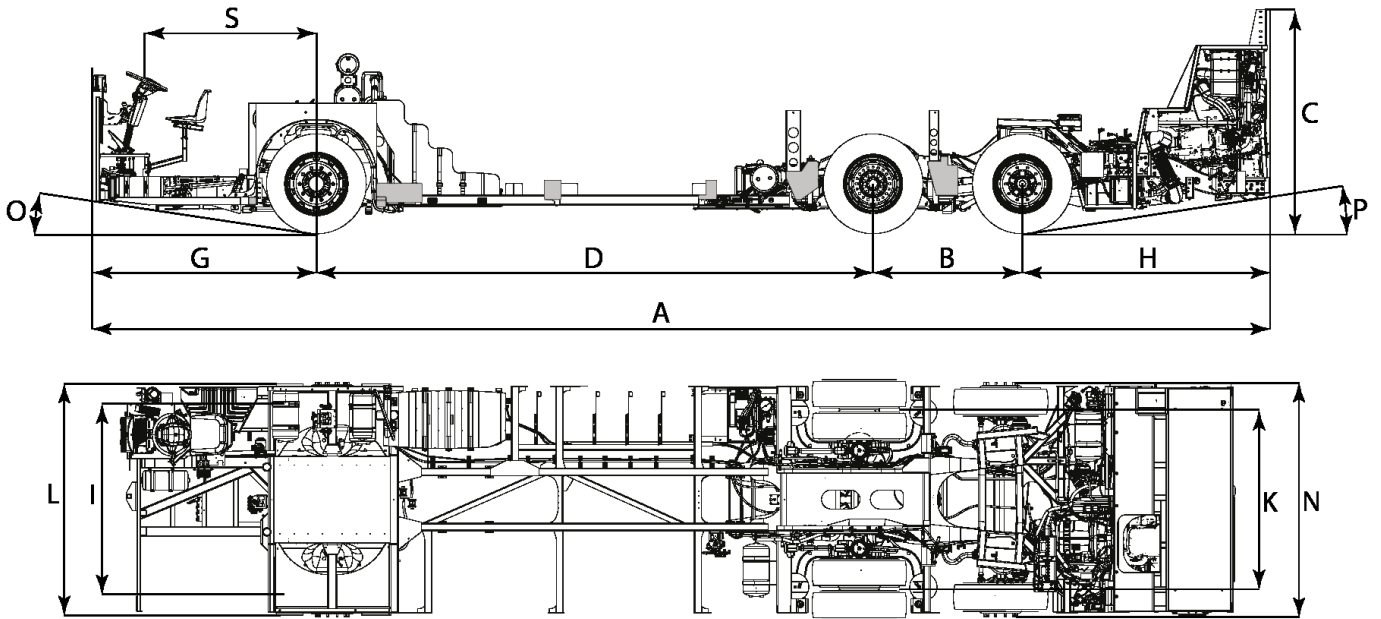

<b>Model</b>	<b>6 x 2</b>
--------------	--------------

<b>Overall dimensions</b>		
A	Overall chassis length (mm)	11,791
B	Bogie (mm)	1,500
C	Frame height at rear structure (mm)*	2,213
D	Wheelbase (mm)	5,590
G	Front overhang (mm)	2,213
H	Rear overhang (mm)	2,488
S	Steering wheel position (mm)	1,703
I	Track, front (mm)*	2,069
K	Track, rear (mm)*	1,878
L	Overall width front wheels or housing (mm)*	2,450
N	Overall width rear wheels (mm)*	2,526
O	Approach angle (°)	7.5
P	Departure angle (°)	8
*) Track width, overall width and frame height are measured with tyres: and steel rims		305/70 R22.5 steel disc rim 8.25" x 22.5"

<b>Weights</b>		
Permitted front axle load (kg)		7,500
Permitted drive axle load (kg)		11,500
Bogie axle load (kg)		17,300
Permitted tag axle load (kg)		6,700
Permitted GVW (kg)		24,750

# VOLVO B8L DOUBLE DECKER

Euro 6

Model	6 x 2
<b>Engine</b>	
Emission standard	Euro 6
Engine system	EGR, Common Rail
Displacement (dm <sup>3</sup> )	7.7
Cylinders/arrangement	6/in-line
Output (hp)	350
Output ISO 1585 (kW)	258
Torque ISO 1585 (Nm)	1,400
at engine speed (rpm)	1,200-1,600
<b>Fuel tanks</b>	
Diesel (L)	350, 375
AdBlue® (L)	30
AdBlue® tank side (RHS/LHS)	RHS
Oilmaster® (L)	7
<b>Transmission and axles</b>	
Gearbox	ZF 6AP1400C
	ZF 6AP1600C
Front axle	Volvo RFS
Rear axle	ZF AV133
Tag axle	Fixed
Differential lock	No
<b>Suspension and steering</b>	
Air bellows, front	2
Air bellows, drive	4
Air bellows, tag	2
Kneeling	Standard
Max wheel angle	52°
Power steering	Electric driven hydraulic steering
Steering wheel position	RHD

## Important information

For variants concerning wheelbase, steering wheel diameter and permitted front axle load, see Type approval according to EC/70/311/ECE R79 and EC/71/320/ECE R13.

## Exhaust system

- One box muffler design
- Diesel Oxidation Catalyst (DOC)
- Diesel Particulate Filter (DPF)
- Selective Catalytic Reduction (SCR)
- Ammonia Slip Catalyst (ASC)
- Automatic regeneration of DPF without driver involvement under normal conditions
- On Board Diagnostic (OBD) for emissions, according to step C of emission regulations

## Cooling system

- Electrically driven fans with speed control
- No coolant filter
- Coolant level warning in instrument cluster
- Higher allowed coolant temperature for better cooling performance and lower fuel consumption

## Tyres and rims

Steel or aluminium rims available

Rims	Tyres
8.25 x 22.5"	305/70 R22.5

# VOLVO B8L DOUBLE DECKER

Euro 6

## Air and brake system

- Volvo disc brakes
- Electronic Stability Program (ESP)
- Electronic Braking System (EBS 5)
- Anti-lock Braking System (ABS)
- Acceleration Slip Regulation (ASR)
- Brake blending
- Drag torque control
- Hill Start Aid
- Brake temperature warning
- Poor brake performance warning
- Door brake
- Brake assistant
- Lining wear sensing and analysis
- Automatic calibration after brake pad change
- Compressed air system, easily filled from external circuit

Cut-in pressure	9.5 bar
Cut-out pressure	12.5 bar

## Driver's station

Cluster and controls transit mounted.

- Instrument cluster
  - speedometer
  - rev counter
  - 6.5" display
  - fuel gauge
  - coolant temperature
  - brakes
  - turbo and oil pressure
  - indicators
  - warning lamps
- Tachograph
- Data logging
- External temperature meter
- Fuel economy meter
- Engine controls in engine compartment to enable engine operation from the rear of the vehicle

## Electrical system

- Volvo I-Start system
  - dual battery system that separates batteries into two circuits
  - optimised start batteries to increase engine start capability
  - optimised consumer batteries for longer lifetime
- Automatic shut off of main switch at low voltage level
- Load balanced alternators
- Regenerative charge control to increase fuel efficiency

### Number of batteries

Start batteries	2 x 12 V
Consumer batteries	2 x 12 V

### Battery capacity

Start batteries	2 x 35 Ah
Consumer batteries	2 x 105 Ah

**V O L V O**

**Volvo Bus Corporation**

volvobuses.com