
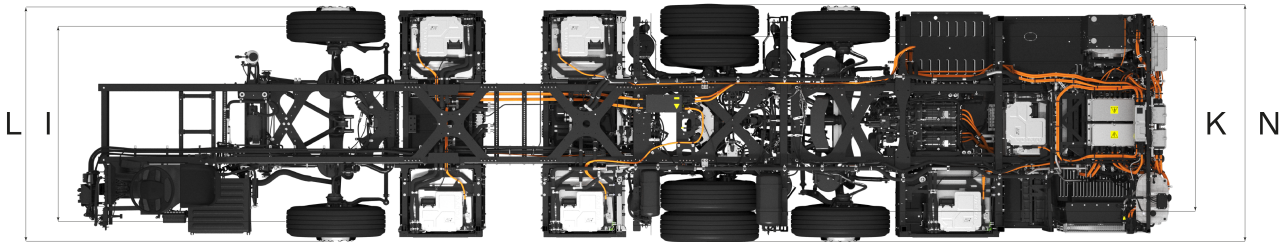


## VOLVO BZR ELECTRIC 6X2

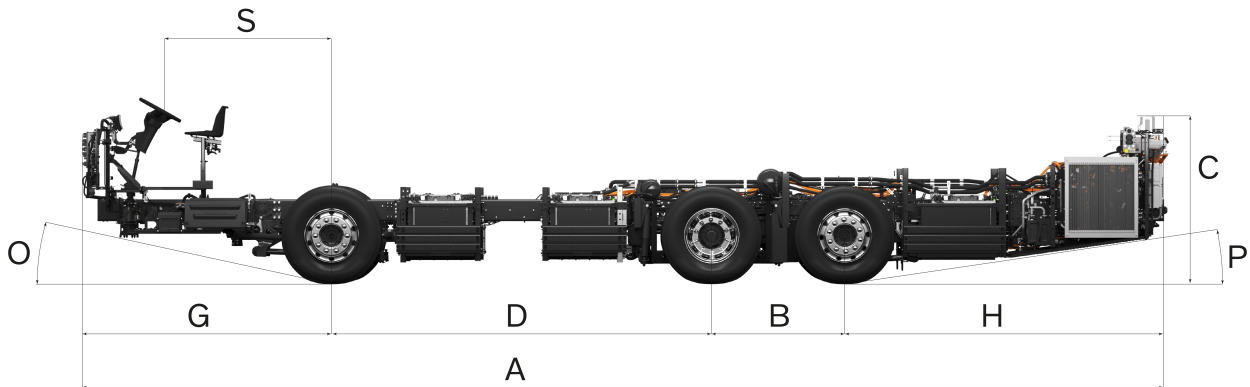

### Model BZR Electric 6x2

#### Overall dimensions

A	Overall chassis length, depending on body, up to (mm)		12,480–14,960
B	Bogie distance (mm)		1,400
C	Frame height at rear structure (mm)*		1,560
D	Transport wheelbase (mm)		4,000
	Approved wheelbase (mm)		5,500–7,400
G	Front overhang (mm)	SWP1470	2,150
		SWP1650	2,330
		SWP1820	2,500
		SWP2050	2,730
H	Rear overhang (mm)		3,430
S	Steering wheel position (mm)		1,470
			1,650
			1,820
			2,050
I	Track, front (mm)*		2,049
K	Track, rear (mm)*		1,834
L	Overall width front wheels or housing (mm)*		2,500
N	Overall width rear wheels (mm)*		2,480
O	Approach angle (°) (SWP2050)*		8.0

# VOLVO BZR ELECTRIC 6X2

## Model BZR Electric 6x2

P	Departure angle (°)	8.0
	*) Overall height, approach and departure angles with tyres:	295/80 R22.5, 8.25 x 22.5

## Weights

Permitted front axle load (kg)	8,200
Permitted drive axle load (kg)	11,500
Permitted tag axle load (kg)	5,750/7,500
Bogie axle load (kg)	17,250/19,000
Permitted GVW (kg)	27,200

## Electric motor

### EPT802 (2 motors)

Output, max (kW)	R85 max 400
Continuous power (kW)	R85 30 min 334
Max torque (Nm)	850
Max wheel torque (Nm)	31,000

## Energy storage system (ESS)

Available storage energy (battery capacity)	90 kWh
Available storage energy (5–6 batteries)	450–540 kWh
Battery chemistry type	Lithium-ion, NCA
Voltage	600 V
Mass per battery (kg)	535 kg

## Electrical system (Automatic shut off of main switch at low voltage level)

Number of batteries	2 x 12 V
Battery capacity	2 x 140 Ah

## Transmission and axles

Gearbox	Volvo 2-speed automated manual transmission
Front axle	Volvo RFS
Rear axle	Volvo RS1228C
Differential lock	Optional

## Suspension and steering

Air bellows, front	2
Air bellows, rear	4
Kneeling	Optional
Max wheel angle	52 with 295/80 22.5 tyres
Power steering	Electric driven hydraulic steering
Steering wheel side	LHD/RHD

## Tires and rims

Tires	275/70 R22.5"
	295/80 R22.5"
	305/70 R22.5"
	315/70 R22.5"
	315/80 R22.5"
Rims (steel or aluminum)	7.50 x 22.5
	8.25 x 22.5
	9.00 x 22.5

# VOLVO BZR ELECTRIC 6X2

## Charging system

### CCS2 DC

- Industry standard solution
- Maximum charge power 250 kW
- Front or rear/left or right charging

### OppCharge

- Industry standard solution
- Maximum charge power 450 kW
- Customer decision of position of rails

## Energy storage system (ESS) safety

- Battery monitoring
- Safety on cell and pack level (monitoring)
- Insulation isolation resistance monitoring
- Charging safety
- Workshop safety
- Mechanical protection
- E-info session
- Rescue sheet

## Volvo Ready to run

- The bus will keep the batteries in working temperature, to ensure that the bus can be started directly when needed without a pre-heating period
- 24 V batteries will be charged from the 600 V battery
- Pre-heating/cooling of the interior can be done when supported by HVAC supplier

## Thermal management system

- Thermal management system independent from climate system
- Coolant level warning in instrument cluster
- Automated control of battery temperature with energy-efficient 600 V active cooling/heating system
- Electric driveline and auxiliaries cooling circuit
- Waste heat from the driveline circuit used to heat the battery circuit through a heat exchanger

## Climate system

- Chassis prepared for various roof-mounted HVAC units from different suppliers (heating, ventilation and air conditioning, including heat pump functionality)

## Air and brake system

- Volvo disc brakes
- Electronic Braking System (EBS 5)
- Anti-lock Braking System (ABS)
- Acceleration Slip Regulation (ASR)
- Brake blending
- Hill Start Aid
- Brake temperature warning
- Poor brake performance warning
- Door brake
- Brake Assistant
- Lining wear sensing and analysis
- Automatic calibration after brake pad change
- Pneumatic system, easily filled from external circuit
- Electronic Stability Control

## Driver's station

Cluster and controls transit-mounted. Also available with Volvo dashboard:

- Dashboard that moves with steering wheel adjustment
- Volvo Dynamic Steering
- Digital instrument cluster
- Steering wheel buttons for easy access
- Integrated infotainment
- Digital speed
- Charging information
- State of charge in %
- Remaining distance
- Power meter
- Volvo active safety systems
- Longer retarder stalk

## Active safety systems

- Front/rear camera
- Side/front radars
- Forward Collision Warning
- Side Collision Avoidance Support
- Front Short Range Assist
- Lane Keeping Support
- Lane Change Support
- Intelligent Speed Assist
- Driver Alert Support
- Tire Pressure Monitoring System