




Volvo Buses. Driving quality of life

VOLVO 9700 15.0 M

Euro 6, Second door behind rear axle

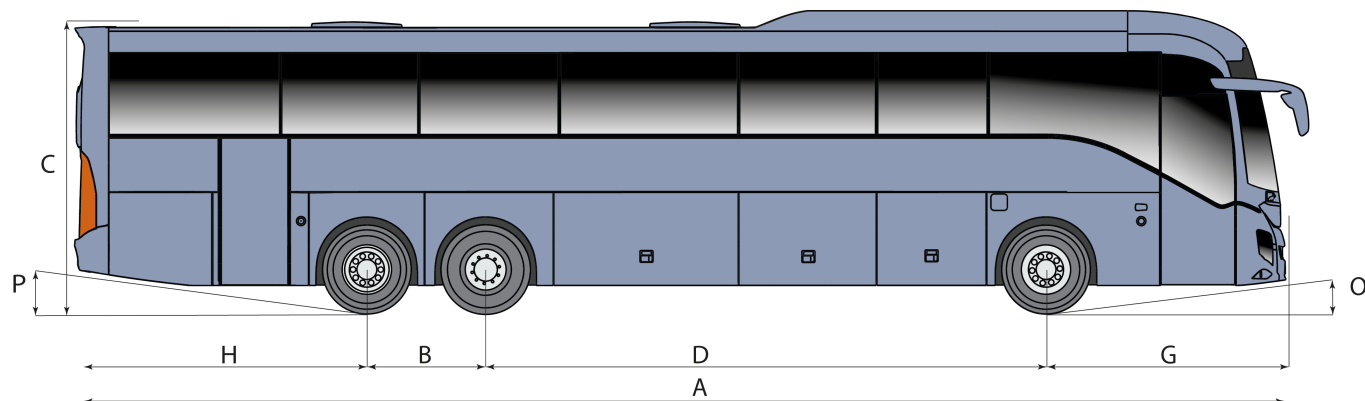

Model	6 x 2, 15.0 m
--------------	----------------------

Overall dimensions		
A	Overall length (mm)	14955
	Overall width (mm)	2550
B	Bogie (mm)	1400
	Overall height, without AC (mm)*	3624
C	Overall height, with AC (mm)*	3650
D	Wheelbase (mm)	7090
G	Front overhang (mm)	2895
H	Rear overhang (mm)	3570
O	Approach angle (°)*	7.2
P	Departure angle (°)*	9.4
	Turning radius (outer front corner) (mm)	11970
	Turning radius (outer front wheel) (mm)	9790
*)	Overall height, approach and departure angles with tyres	315/80 R22.5

Weights	
Permitted front axle load (kg)	7500
Permitted drive axle load (kg)	11500
Bogie axle load (kg)	19000
Permitted tag axle load (kg)	7500
Permitted GVW (kg)	26500

Luggage capacity	
Luggage compartment volume, with toilet, without resting compartment (m ³)	13.3
Drivers resting compartment (m ³)	n/a
Volume of interior luggage racks (m ³)	2.0

Passenger capacity	
Depending on seat layout and comfort level	61

VOLVO 9700 15.0 M

Euro 6, Second door behind rear axle

Model	6 x 2, 15.0 m
Engine	D11K
Emission standard	Euro 6
Engine system	SCR, common rail
Displacement (dm ³)	10.8
Cylinders/arrangement	6/in-line
Engine rating	D11K380
Output (hp) (±0-4%)	380
Output ISO 1585 (kW) (±0-4%)	280
Torque ISO 1585 (Nm); at engine speed 1000-1400 rpm	1800 (950-1400 rpm)
Engine rating	D11K430
Output (hp) (±0-4%)	430
Output ISO 1585 (kW) (±0-4%)	316
Torque ISO 1585 (Nm); at engine speed 1000-1400 rpm	2050
Engine rating	D11K460
Output (hp) (±0-4%)	460
Output ISO 1585 (kW) (±0-4%)	339
Torque ISO 1585 (Nm); at engine speed 1000-1400 rpm	2200
Fuel tanks	
Diesel (L)	480, 600
AdBlue (L)	64
AdBlue tank side (RHS/LHS)	LHS
Transmission and axles	
Gearbox	Volvo I-Shift AT2412F
Front axle	Volvo IFS
Rear axle	Volvo RS1228C
Differential lock	Optional
Steering and suspension	
Steering wheel side	LHD
Power steering	Hydraulic power steering
Kneeling	Optional

Exhaust system

- One box muffler design
- Diesel Oxidation Catalyst (DOC)
- Diesel Particulate Filter (DPF)
- Selective Catalytic Reduction (SCR)
- Ammonia Slip Catalyst (ASC)
- Automatic regeneration of DPF without driver involvement under normal conditions
- On Board Diagnostic (OBD) for emissions, according to step D of emission regulations
- Engine certified for usage with hydrotreated vegetable oil (HVO, standard EN 15940)
- Biodiesel available for D11K460

Cooling system

- Pivotal radiator to ease access for maintenance
- No coolant filter
- Higher allowed coolant temperature for better cooling performance and lower fuel consumption

Fuel efficiency features

- Dynamic Chassis Lowering
- I-See

VOLVO 9700 15.0 M

Euro 6, Second door behind rear axle

Air and brake system

- Collision Warning with Emergency Brake (CW-EB)
- Volvo disc brakes
- Electronic Stability Program (ESP)
- Electronic Braking System (EBS 5)
- Anti-lock Braking System (ABS)
- Acceleration Slip Regulation (ASR)
- Brake blending
- Dual retarder control
- Drag torque control
- Hill Start Aid
- Brake temperature warning
- Poor brake performance warning
- Door brake
- Brake assistant
- Lining wear sensing and analysis
- Automatic calibration after brake pad change
- Compressed air system, easily filled from external circuit

Tyres and rims

Steel or aluminium rims available

Rims	Tyres
8.25" x 22.5"	295/80 R22.5"
9.00" x 22.5"	315/80 R22.5"
Spare wheel	Optional

Exterior and structure

- Roof made of sandwich structure
- Stainless steel in body structure and side paneling
- Stainless steel front and rear frame
- Front and rear wall in one piece composite material
- Front Underrun Protection System (FUPS)
- Reinforced Front Impact Protection System (FIP)
- Anti-corrosion treatment of underbody frame with conservation and silencing agent
- Multilayer exterior paint finish
- Aerodynamic design of windscreen
- Electrical heating system and UV-protection in windscreen
- Side and rear window with dark tinted double glazing
- Driver window electrically operated, heated single glazing
- Front door with double glazing
- Mirrors electrically adjustable, heated and foldable
- Brackets for ski-box or cycle carrier in the rear
- Luggage hatches - parallel opening mechanism
- Two roof hatches manually or electrically operated
- Roof plate in aluminium
- Luggage hatches in anodized aluminium
- Central locking of luggage compartment
- Halogen or Bi-Xenon headlights
- Headlight cleaner

Doors and door system

- First door outward or inward swinging
- Second door outward swinging
- Software safety system
- Lift and lock system for tight closure

Wheelchair lift

- Available in middle door or sidewall with dedicated door

Climate system

- Roof unit with cooling and heating
- Pipe convectors
- Defroster with AC
- Driver convector or blower
- Auxiliary diesel heater
- Separate climate zones for driver and passengers

AC unit option 1

Maximum cooling capacity: 31 kW
Heating capacity at Q80 38 kW

AC unit option 2

Maximum cooling capacity 37 kW
Heating capacity at Q80 38 kW

Convectors

Heating capacity at Q60 470 W/m
Heating capacity at Q100 780 W/m

Defroster

Heating capacity at Q80 16 kW
Cooling capacity max 5 kW
Airflow max at dP 0 730 m³/h
Available with/without AC

Auxiliary heater

Heating capacity 30 kW

VOLVO 9700 15.0 M

Euro 6, Second door behind rear axle

Interior

- Several interior colour lines
- Curtains or sun blinds for side windows
- Removable carpets for all interior floor and luggage floor surfaces
- Sunken gangway
- Water toilet with 123-litre water tank
- Lockable storage boxes
- Storage box beside guide seat
- Refrigerator (54 litres) in dashboard, beside guide seat or at side of toilet housing
- Minikitchen
- Two options of coffee machine
- Safe box
- Waste bin (50 litres) at toilet housing
- Passenger display with clock and exterior temperature
- Interior LED lighting for driver and guide
- Individual reading lights for passengers (LED)
- Light in luggage room and engine room
- Blue LED night illumination along gangway
- Safety illumination for entrance steps
- Special emergency interior illumination system
- Fire detection system (R107.06)

Passenger seats

Volvo coach line, Volvo intercity line, or Volvo city line seats, featuring:

- Unique product design
- Superior ergonomics and comfort
- Low weight
- Available in wide range of specifications to meet the demands of individual customers
- Volvo Service and spare parts handling

Driver's seat and station

- Steering wheel adjustment in height and tilt
- Steering wheel available in 450 or 500 mm
- Styling options for dashboard
- Instrument cluster with 6.5" display
- Tachograph
- Data logging
- Volvo Alcolock
- Knee Impact Protection (KIP)
- External temperature meter
- Engine controls in engine compartment to enable engine operation from the rear of vehicle
- ISRI driver's seat
- Lane Keeping Support (LKS)
- Volvo Dynamic Steering (VDS)
- Adaptive Cruise Control
- Driver Alert System (DAS)
- Rear view camera
- Rear parking sensors

Electrical system

- Volvo I-Start system for increased uptime and extended battery life
- Automatic shut off of main switch at low voltage level
- Load balanced alternators
- Regenerative charge control to increase fuel efficiency

Battery capacity

Start batteries	2 x 35 Ah
Consumer batteries	2 x 170 Ah

Alternators max output

2 x 150 A, 3 x 150 A

Audiovisual system

- Bosch audio/video system
- Two DIN units with radio and DVD
- Driver's monitor
- Driver and guide microphones
- USB connection on dashboard
- 19" widescreen monitors, flip-down or fixed
- Subwoofer

VOLVO

Volvo Bus Corporation

volvobuses.com